
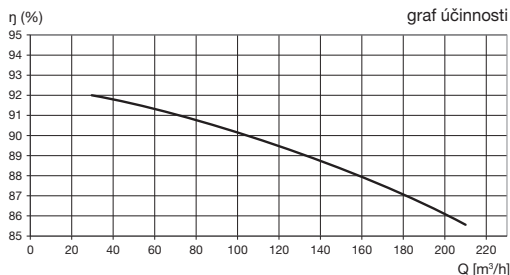


Charakteristiky

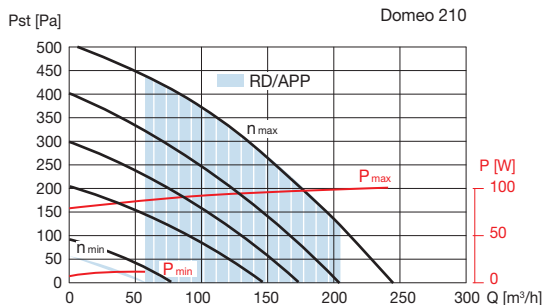

Akustický výkon ve středě oktavových pásem [dB(A)] – výtlač

Q (m³/h)	63	125	250	500	1000	2000	4000	8000	L _{WAot}
60	10	12	15	22	19	17	15	14	26
105	19	31	43	49	50	45	34	22	53
150	27	34	51	55	57	52	45	29	61
180	25	37	49	59	62	57	52	36	64
210	29	41	53	62	66	61	55	39	69

Akustický výkon ve středě oktavových pásem [dB(A)] – do okolí

Q (m³/h)	63	125	250	500	1000	2000	4000	8000	L _{WAot}
60	12	24	40	43	39	41	22	16	47
105	18	30	45	49	45	47	27	22	53
150	23	33	50	53	49	49	35	23	57
180	34	38	49	55	54	50	42	28	59
210	36	40	51	57	56	52	44	30	61


Doplňující vyobrazení



ovladač jednotky (součást dodávky)




TSP-B LCD ovladač jednotky (na objednávku)



snadný přístup k jádru jednotky umožňující snadnou údržbu

Akustický výkon ve středě oktavových pásem [dB(A)] – sání

Q (m³/h)	63	125	250	500	1000	2000	4000	8000	L _{WAot}
60	10	12	15	22	19	17	15	14	26
105	18	19	23	29	27	24	23	22	33
150	21	23	27	35	34	30	24	23	39
180	22	27	30	37	38	34	24	21	42
210	25	29	33	40	41	37	27	24	45

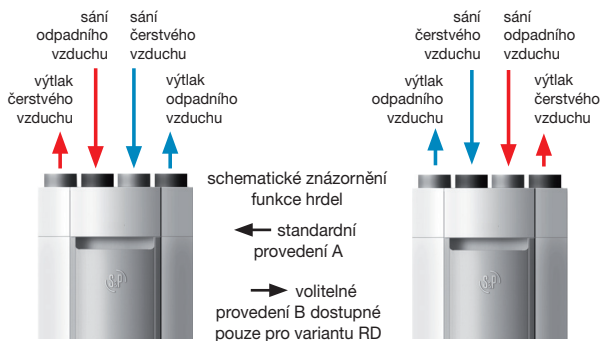

Příslušenství



MBE-AFP 125/0,4 aktivní protimrazová ochrana



CONTROL-CO2 čidlo CO₂



CONTROL-VOC čidlo kvality vzduchu



CONTROL-HR čidlo relativní vlhkosti

ED FLEX System®



ED PLANO System®

