
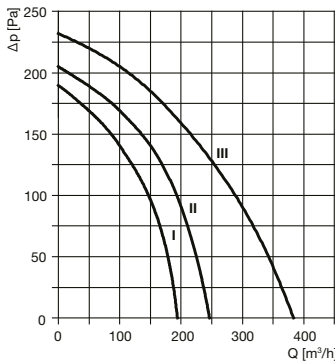


Chimney hoods with fan

BOX-60 E INOX / BOX-70 E INOX / BOX-90 E INOX



- choice of three fan speeds
- lighting: LED 2× 2.5W
- professional aluminum grease filter
- check valve on discharge
- air recirculation through carbon filters (accessories)
- upper outlet for connection
- design: stainless steel
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600, 700 and 900



I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
BOX E INOX	368	150 (120)	1	3	230	135	0.61	50

* sound pressure measured at a distance of 1.5 m in a free field

ONDA CRISTAL

6

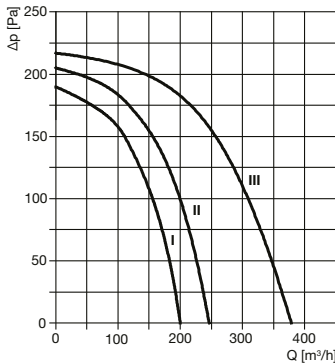

- choice of three fan speeds
- lighting: LED 2× 2.5W
- professional metal grease filter
- check valve on discharge
- air recirculation through 2 carbon filters (accessories)
- upper outlet for connection
- design: stainless steel or glass
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600 and 900

I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
ONDA CRISTAL	382	150 (120)	1	3	230	135	0.61	50

* sound pressure measured at a distance of 1.5 m in a free field