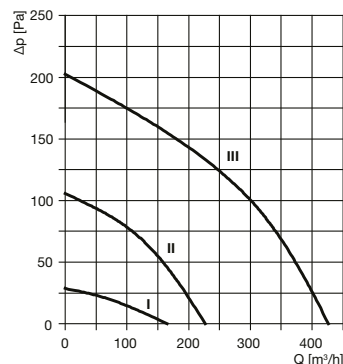



Chimney hoods with fan

HA-600 E INOX / HA-900 E INOX

395 m³/h

- choice of three fan speeds
- lighting: LED 2× 3 W
- professional aluminum grease filter
- check valve on discharge
- air recirculation through carbon filters (accessories)



- upper outlet for connection
- design: stainless steel
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600 and 900

I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m ³ /h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
HA-600 E / HA-900 E	395	150 (120)	1	3	230	90	0.42	56

* sound pressure measured at a distance of 1.5 m in the free field

VA-60 E / VA-90 E

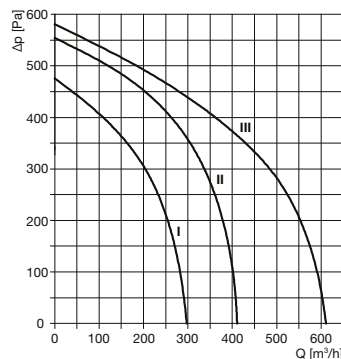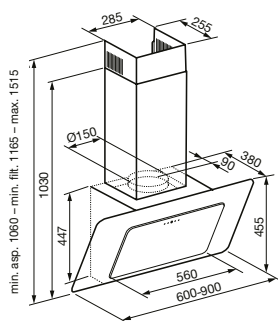757 m³/h

- choice of three fan speeds
- 15 minute run in turbo mode for increased traction
- lighting: LED 2× 2.5 W
- professional aluminum grease filter
- check valve on discharge
- upper outlet for connection

- air recirculation through carbon filters (accessories)
- color design: white
- design: glass
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600 and 900

I – low speed
II – medium speed
III – high speed



Type	max. flow rate [m ³ /h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
VA E	603 ⁽¹⁾ /757 ⁽²⁾	150 (120)	1	3+1**	230	260	1.15	53 ⁽¹⁾ /58 ⁽²⁾

* sound pressure measured at a distance of 1.5 m in a free field; ** three speeds + turbo for 15 minutes

⁽¹⁾ standard operation; ⁽²⁾ turbo (for 15 minutes)

Chimney hoods with fan

BOX-60 E INOX / BOX-70 E INOX / BOX-90 E INOX

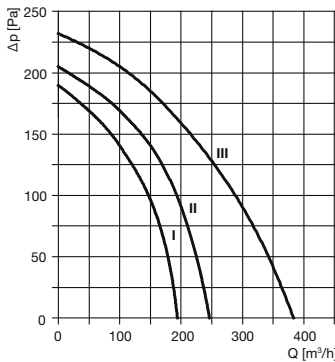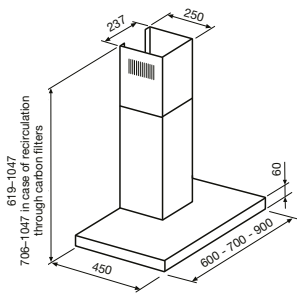

- choice of three fan speeds
- lighting: LED 2× 2.5W
- professional aluminum grease filter
- check valve on discharge
- air recirculation through carbon filters (accessories)
- upper outlet for connection
- design: stainless steel
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600, 700 and 900



I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
BOX E INOX	368	150 (120)	1	3	230	135	0.61	50

* sound pressure measured at a distance of 1.5 m in a free field

ONDA CRISTAL

6

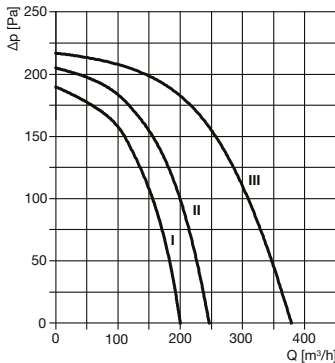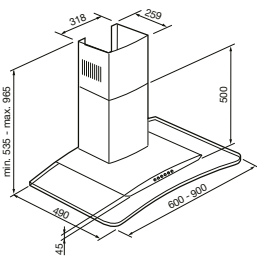

- choice of three fan speeds
- lighting: LED 2× 2.5W
- professional metal grease filter
- check valve on discharge
- air recirculation through 2 carbon filters (accessories)
- upper outlet for connection
- design: stainless steel or glass
- telescopic chimney
- reduction for discharge pipe DN 150/120
- available sizes (width in mm): 600 and 900

I – low speed
II – medium speed
III – high speed

Type	max. flow rate [m³/h]	diameter [mm]	number engines	number speed	voltage [V]	performance [W]	current [A]	acoustic pressure* [dB(A)]
ONDA CRISTAL	382	150 (120)	1	3	230	135	0.61	50

* sound pressure measured at a distance of 1.5 m in a free field

Accessories		HP E	HA E INOX	BOX E INOX	ONDA CRISTAL E	VA E
	flexible hoses SEMIFLEX® ALUFLEX® TERMOFLEX®	Ø 125	Ø 150	Ø 150	Ø 150	Ø 150
	OSJ steel buckle	Ø 125	Ø 150	Ø 150	Ø 150	Ø 150
	PER check valve	PER 125	PER 150	PER 150	PER 150 W	PER 150
	RH rain cover	RH 125	RH 150	RH 150	RH 150	RH 150
	carbon filters (optional accessories)	HP E HP E N PLUS	HA E HA E PLUS	BOX E	ONDA CRISTAL E	VA E

Accessories		ISLA INOX	ISLA CRISTAL	GE-60 E N METAL	GL-60 E N PLUS METAL	GET-60 E PLUS INOX
	flexible hoses SEMIFLEX® ALUFLEX® TERMOFLEX®	Ø 150	Ø 150	Ø 125	Ø 125	Ø 125
	OSJ steel buckle	Ø 150	Ø 150	Ø 125	Ø 125	Ø 125
	PER check valve	PER 150	PER 150	PER 125	PER 125	PER 125
	RH rain cover	RH 150	RH 150	RH 125	RH 125	RH 125
	carbon filters (optional accessories)	2× DN190	2× DN190	GE E N	GL E N	GET E