


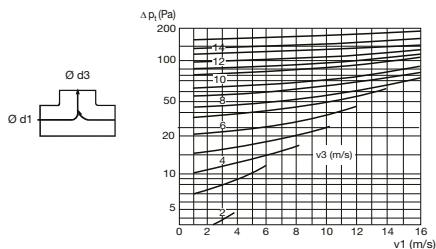
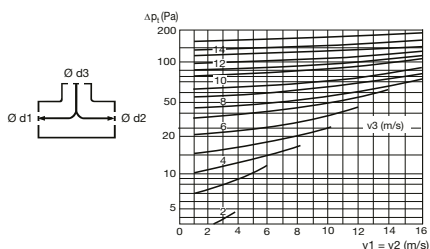
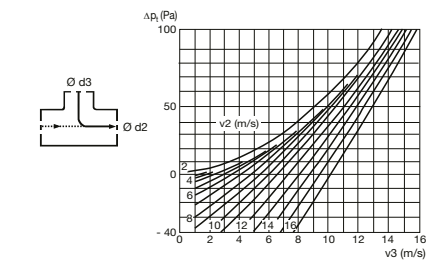
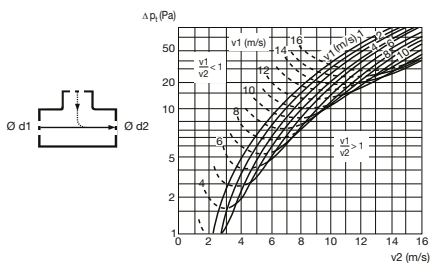


OBJL 90° – odbočka jednostranná, OBJLG 90° – odbočka jednostranná s těsněním

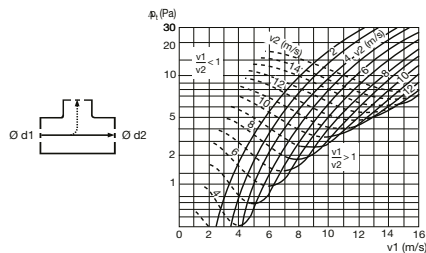

- tvarovka je vyrobena lisováním
- větrání, klimatizace
- spojení s potrubím samořeznými šrouby

| Ø d3<br>[mm] | Ø d1 [mm] |    |     |    |     |    |     |    |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------|-----------|----|-----|----|-----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 80        |    | 100 |    | 125 |    | 150 |    | 160 |     | 180 |     | 200 |     | 224 |     | 250 |     | 315 |     |
|              | L         | H  | L   | H  | L   | H  | L   | H  | L   | H   | L   | H   | L   | H   | L   | H   | L   | H   | L   | H   |
| 80           | 140       | 52 | 126 | 65 | 146 | 75 | 140 | 87 | 140 | 92  | 140 | 102 | 140 | 112 | 140 | 124 | 156 | 137 | –   |     |
| 100          | –         |    | 170 | 65 | 184 | 78 | 175 | 90 | 184 | 95  | 175 | 105 | 175 | 115 | 175 | 127 | 175 | 140 | –   |     |
| 125          | –         |    | –   |    | 200 | 83 | 215 | 95 | 229 | 100 | 215 | 110 | 215 | 115 | 215 | 132 | 220 | 145 | 220 | 178 |
| 150          | –         |    | –   |    | –   |    | 260 | 95 | –   |     | –   |     | 260 | 120 | –   |     | –   |     | –   |     |
| 160          | –         |    | –   |    | –   |    | –   |    | 229 | 105 | 260 | 115 | 281 | 125 | 260 | 137 | 256 | 150 | –   |     |
| 200          | –         |    | –   |    | –   |    | –   |    | –   |     | –   |     | 265 | 125 | 346 | 137 | 306 | 150 | 306 | 182 |
| 250          | –         |    | –   |    | –   |    | –   |    | –   |     | –   |     | –   |     | –   |     | 307 | 150 | 350 | 182 |
| 315          | –         |    | –   |    | –   |    | –   |    | –   |     | –   |     | –   |     | –   |     | –   |     | 390 | 182 |

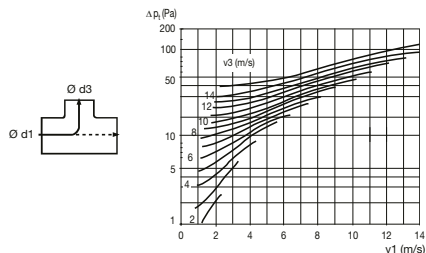

v1, v2, v3 – průměrná rychlost v hrdle d1, d2, d3