

Environmental Product Declaration

In accordance with ISO 14025:2006, EN 15804:2012+A2:2019 / AC:2021 and c-PCR-018 for Ventilation components (Adopted from NPCR 030:2021) for:

DOMESTIC HEAT RECOVERY VENTILATION SYSTEMS

SABIK

EPD of multiple products, based on a representative product.

Products included:

All models of the SABIK series. The products directly represented in the EPD are all existing models.

SABIK 210

SABIK 210E

SABIK 350

SABIK 350E

SABIK 500

SABIK 500E

SABIK 600

SABIK 600E

From:

S&P Sistemas de Ventilación, S.L

Programme: The International EPD® System, www.environdec.com

Programme operator: EPD International AB

Type of EPD EPD of multiple products, from a company

EPD registration number: EPD-IES-0013020

Version date: 2025-12-12

Valid until: 2030-12-12

An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com.



EPD®
THE INTERNATIONAL EPD® SYSTEM

General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@.environdec.com

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR): PCR 2019:14 Construction products, version 2.0.1 published on 2025.06.05 and c-PCR-018 Ventilation components (Adopted from NPCR 030:2021).

PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via the Secretariat www.environdec.com/contact

Third-party Verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

Individual EPD verification without a pre-verified LCA/EPD tool.

Third-party verifier: Elisabet Amat Guasch (Greenize Projects) (eamat@greenize.es)

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

For further information about comparability, see EN 15804 and ISO 14025.

Information about EPD owner

- **Owner of the EPD:** S&P SISTEMAS DE VENTILACIÓN, SL.
- **Address:** Calle Llevant, 4 - Polígono Industrial Llevant; 08150 Parets del Vallès (Barcelona).
- **Contact and LCA practitioner:** Martí Roig Rabadà (mroig@solerpalau.com), Product Sustainability Manager.
- **Description of the organisation:** Committed to improving indoor air quality and making it accessible to everyone, S&P develops highly energy-efficient, reliable, and durable ventilation solutions that benefit both our customers and the planet. Easy installation is a key pillar of our innovation, ensuring our products meet the needs of both users and installers. We also prioritize human well-being, which is why we are dedicated to designing exceptionally quiet equipment.



- **Product-related or management system-related certifications:** ISO 9001 (ES-257/2001) and ISO 14001 (ES-2001/0052).



Product information

- **Product name:** DOMESTIC HEAT RECOVERY VENTILATION SYSTEMS: SABIK
- **Product identification:** Range of domestic MVHR units with low consumption EC motors and high efficiency counterflow heat exchangers available both in sensible and enthalpy versions.
- **UN CPC code:** Ventilation and air-conditioning equipment installation services (CPC 54632, version 2.1 dated 2015).
- **Product description:** The SABIK ensures continuous and balanced ventilation system, extracting moist stale air from the wet rooms and at the same time introducing a tempered and filtered fresh air to the habitable rooms. The optimized design allows compliance with the highest standards assuring a very low leakage level, high thermal insulation and a minimal sound level. The integrated humidity sensor allows an automatic function tracking the indoor humidity and proportionally adjusting the fans speed.
- **Name and location of production site(s):** The product is manufactured in two sites of the S&P SISTEMAS DE VENTILACIÓN, SL group, located in the province of Barcelona and Girona.
- **Included products:** This EPD covers multiple product configurations within the SABIK range. The representative model, SABIK 350, has been selected because it has a high sales volume and is representative of a mid-range model. In addition, all other products within the range, including the 'worst-case' configuration, SABIK 600E, are also included in the variability analysis.

Content declaration

None of the components present in the final product and included in the "Candidate List of Substances of Extreme Concern in the authorization procedure" of the REACH regulation has a percentage higher than 0,1%.

The wooden pallet used for transport is assigned individually to each unit and is considered in a single-use cycle.

- Product mass:** The mass of the products (including packaging) is listed below.

Product Case	Product name	Mass (Kg)*
Reference Product	SABIK 350	61,22
Best case	SABIK 210	47,73
Worst case	SABIK 600E	80,10

* Including packaging and pallet.




Product components	Reference Product Mass, kg	Best case Product Mass, kg	Worst case Product Mass, kg	Post-consumer material, Mass-%	Biogenic material, Mass, kg C/kg
Steel	22,03	16,53	23,97	0%	-
Aluminium	0,95	0,94	1,53	0%	-
Copper	0,17	0,17	0,21	0%	-
Plastics	21,11	13,62	34,07	0%	-
Electrical and electronic components	1,84	1,31	2,21	0%	-
TOTAL	46,07	32,57	61,97	0%	-

Packaging materials	Reference Product Mass, kg	Best case Product Mass, kg	Worst case Product Mass, kg	Mass-% (versus the reference product)	Mass biogenic carbon, kg C/kg
Cardboard	5,20	5,20	7,19	11%	0,55
Wood	9,50	9,50	9,50	20%	0,45
Paper	0,43	0,43	1,43	<1%	0,55
Plastic Film	0,04	0,03	0,05	<1%	-
TOTAL	15,15	15,14	18,13	32,88%	0,41

LCA information

- **Declared unit:** 1 unit of SABIK 350.
- **Reference service life:** The product is maintained for 17 years. The period has been selected to seek present and future harmonization with other international environmental product declaration programs as for example PEP Ecopassport.
- **Technical service life:** 25 years.
- **Time representativeness:** All specific data related to the production plants and use, used for the study date from 2024.
- **Geographical scope:** The product is manufactured in Spain. LCA downstream scenario considered is Europe, however product can be used globally.
- **Database(s) and LCA software used:**
 - **Primary data:** Extracted directly from S&P's SAP system, organised by substructures. Each substructure includes a detailed Bill of Materials (BOM) with codified components (e.g., screws, electronics, cabling, galvanized sheet). Data were grouped by material families within each substructure (e.g., total galvanized steel, total aluminium).
 - **Secondary data:** Selected from Ecoinvent v3.10.1 (via OneClick LCA), prioritising datasets specific to Spain; when unavailable, representative European datasets were used.
- **EPD/LCA Tool used:** OneClick LCA.
- **Description of system boundaries:** Cradle to gate with options, modules A4-A5, modules B1-B7, modules C1-C4, and module D.

- **System diagram:**

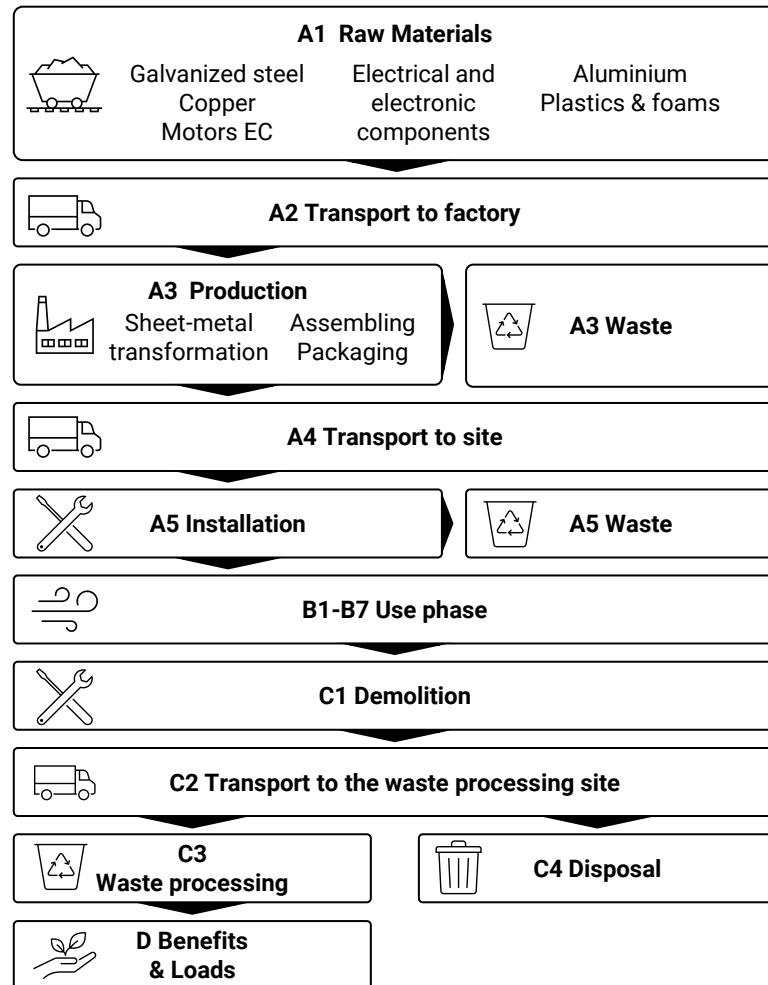

- **Hypothesis and considerations applied:**

PRODUCT STAGE (A1-A3): This stage covers the extraction and supply of raw materials, their transport to the production sites, and the manufacturing of the product.

- **Raw materials supply (A1):** This stage includes the procurement of raw materials and pre-assembled components used in the product's manufacturing. The external galvanized steel sheets are manufactured in-house and are modelled in A1 as primary data and enter A3 as finished subassemblies. Industrial processes associated with purchased materials (e.g., plastic injection, metal working, etc.) are included.

Production losses have been accounted for to ensure consistency with the overall mass balance.

- **Transport (A2):** This stage accounts for the transport of all materials and pre-assembled components from suppliers to the factory for final assembly. It has been modelled as road freight (16–32 t EURO 5) and freight sea container ship with one-way distances based on supplier locations.

- **Manufacturing (A3):** This stage covers full product assembly, and quality testing.

Mass allocation has been applied to accurately determine the share of resources.

Electricity used during the manufacturing process is backed by a certificate of origin issued by the National Commission on Markets and Competition (CNMC), ensuring that it is 100% sourced from renewable energy – specifically, wind power.

The modelled energy mix for A3 module has an emission factor of 0,025 kg CO₂eq/kWh. The transformation losses have been included.

CONSTRUCTION PROCESS STAGE (A4-A5): The construction process stage covers both the transportation of the SABIK to the installation site (A4) and the installation activities at the site (A5).

- **Transportation to site (A4):** Transportation to the installation site is based on the 2024 sales distribution of the SABIK units. Transportation is assumed to cover 642 km by lorries (16–32 metric tons, EURO5) and 682 km by freight sea container ship.

- **Installation (A5):** The installation process has a negligible impact, as it is performed manually. However, the impact of the product packaging that is generated as a waste during this phase is accounted for. Recycling processes have been modeled based on EUROSTAT statistics.



USE STAGE (B1- B7): Includes all impacts associated with the operation, maintenance, and repair of the product throughout its lifespan.

- **Use (B1):** This submodule is negligible, as the product does not generate additional impacts during its normal use.
- **Maintenance (B2):** Preventive maintenance consists of replacing the two air filters once per year. Over the 17-year service life, this represents a total of approximately 4,25 kg of filters replaced. New filters have been modelled using representative market datasets, including production and transport, while used filters have been modelled according to average European waste treatment scenarios. No other periodic maintenance activities are required.
- **Repair, Replacement, and Refurbishment (B3-B5):** These submodules are considered negligible, as no repairs, replacements or refurbishments are expected during the product's service life.
- **Operational Energy Use (B6):** The SABIK is an active product that consumes energy during use.

The operational energy consumption (B6) has been calculated at a typical and realistic operating point, corresponding to the energy consumed when supplying its reference flow rate at the reference pressure. The equipment is assumed to operate continuously (24 hours per day) for 17 years. The annual energy consumption of one unit under these conditions is 595,7 kWh. For more information on equipment consumption, please visit our website.

As the product can be used across Europe, an average market dataset for European low voltage electricity is used. The emission factor for the used dataset is 0,33 Kg CO_{2eq}/kWh. Additional analysis of the impact of the B6 module in different countries and geographies has also been included in the Additional LCA results.

• **Operational Water Use (B7):** This submodule is negligible, as the product does not require water for its operation.

END OF LIFE STAGE (C1-C4): The end-of-life stage includes all processes related to the deconstruction, transport, waste processing, and final disposal of SABIK unit, together with the auxiliary installation elements (duct sleeves, grilles, dampers, and anchoring parts).

- **Deconstruction (C1):** Deconstruction impacts are modeled according to the PCR, considering the default diesel consumption per tonne during dismantling.
- **Transport (C2):** The default transport distance defined in the PCR has been assumed for the waste transported from the product deinstallation point to the waste management facility. Transport is assumed to be carried out using 16–32 metric ton EURO 5 freight lorries in Europe.
- **Waste processing and disposal (C3-C4):** Waste management has been modelled using a conservative and realistic scenario, although the recyclability potential of the equipment is higher than stated in the LCA. The percentages for recycling, incineration (with or without energy recovery), and landfill disposal have been defined based on EN 50693. For the entire product: 62% is recycled, 23% is incinerated (with or without energy recovery), and 15% is landfilled.

Transport is assumed to be carried out using 16–32 t EURO 5 freight lorries in Europe.

Additionally, as stated in the PCR, exclusive waste management scenarios (100% landfilled, 100% recycled, and 100% incinerated) have been included as Additional LCA results.

BENEFITS AND LOADS (D): Accounts for the potential environmental benefits and loads associated with the reuse, recycling, or energy recovery of materials after the product's end-of-life. These benefits are reported beyond the system boundaries.

- **Benefits and loads (D):** To ensure a realistic and evidence-based approach in modelling the impacts of Module D, data points generated by OneClick LCA and based on ECOINVENT data have been used. The quantities assigned to the different data points correspond only to waste that does not go to landfill.



Material	End of Life Stage (C1-C4) Scenario	Benefits and Loads (D) Scenario
Steel	85% is recycled 15% is landfilled	Generation of steel scrap
Aluminium	90% is recycled 10% is landfilled	Generation of aluminium scrap
Copper	60% is recycled 40% is landfilled	Generation of copper scrap
ABS	20% is recycled 40% is incinerated with energy recovery 20% is incinerated without energy recovery 20% is landfilled	Generation of recycled ABS Energy recovery
Other Plastics	50% is incinerated with energy recovery 25% is incinerated without energy recovery 25% is landfilled	Energy recovery
Electric Components	100% is landfilled	-



Soler & Palau encourages the proper management of the equipment's waste and to increase the recyclability ratio at the end of its useful life, as the **product's recyclability potential is >90%**.

- Cut-off rules:** In accordance with the provisions of the PCR 2019:14 construction products, version 2.0.1 and the standard UNE-EN 15804:2012+A2:2020, at least 95% of total inflows and outflows (mass and energy) per module have been included. The "polluter pays" principle has been applied. Additionally, the following processes have been excluded from the study scope:
 - Manufacture of equipment used in production.
 - Business trips.
 - Maintenance activities at the production plants.
 - Transportation of personnel to and within the plants.
 - Diffuse particle emissions during the transport and storage of raw materials.
- Data Quality Assessment:** All process-specific data was collected for the 2024 operating year and is therefore up to date. Manufacturing-related data is based on factory averages, and mass allocation factors have been applied. Primary data accounts for 26% of the overall dataset. The credibility and consistency of the collected data were verified using primary records; where these were unavailable, secondary sources were used. Dataset selection considered geographic relevance, prioritizing regional and country-specific data where available to best reflect actual operational locations. From a technical perspective, when specific data was not available, the most representative proxy datasets were used, selected based on technological equivalence and process similarity. The overall data quality is good.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Share of primary data, of GWP-GHG results for A1					21%
Raw materials	Database + Collected data	Ecoinvent v3.10 & EPD Owner	2024	Primary data and secondary data	22%
Share of primary data, of GWP-GHG results for A2					1%
Transport of raw materials to manufacturing site	Database + Collected data	Ecoinvent v3.10 & EPD Owner	2024	Primary data	100%
Share of primary data, of GWP-GHG results for A3					4%
Manufacturing of the product	Database + Collected data	Ecoinvent v3.10 & EPD Owner	2024	Primary data and secondary data	100%
Total share of primary data, of GWP-GHG results for A1-A3					26%

Modules Declared

The variation in GWP-GHG between the representative product (SABIK 350) and the product with the highest impact (SABIK 600E) in stages A1–A3 is 39%, mainly due to an additional mass of approximately 20kg.

Module	Product stage			Construction Process stage		Use stage						End of Life stage				Resource Recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Geography	GLO	GLO	ES	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27	EU 27
Share of primary data	26% (GWP-GHG)		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	39% (GWP-GHG)		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%		-	-	-	-	-	-	-	-	-	-	-	-	-	-

Environmental performance

Mandatory impact category indicators according to EN 15804

A declared unit of one SABIK 350, with a mass of 46,07kg (excluding packaging), is considered. The impact assessment is based on EF3.1. The estimated results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding thresholds, safety margins and/or risks. The results of the end-of-life stage (C1–C4) should be considered when using the results of the product stage (A1–A3). When comparing results from different Environmental Product Declarations (EPDs), exercise caution due to varying methodologies and uncertainties across programs.

Results per declared unit																
Indicator	Unit	A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-fossil	Kg CO ₂ eq.	2,80E+02	3,43E+00	5,00E-01	0,00E+00	1,46E+00	0,00E+00	0,00E+00	0,00E+00	3,31E+03	0,00E+00	1,83E-02	4,56E-01	2,59E+01	5,94E+00	-3,89E+01
GWP-biogenic	Kg CO ₂ eq.	-2,79E+01	7,05E-04	2,79E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,43E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
GWP-luluc	Kg CO ₂ eq.	6,29E-01	1,34E-03	5,83E-04	0,00E+00	2,95E-03	0,00E+00	0,00E+00	0,00E+00	1,02E+01	0,00E+00	1,87E-06	2,04E-04	9,53E-04	1,94E-04	-1,30E-01
GWP-total	Kg CO ₂ eq.	2,53E+02	3,43E+00	2,84E+01	0,00E+00	1,46E+00	0,00E+00	0,00E+00	0,00E+00	3,33E+03	0,00E+00	1,83E-02	4,56E-01	2,59E+01	5,94E+00	-3,91E+01
ODP	kg CFC11 _{eq.}	2,01E-05	6,72E-08	5,61E-09	0,00E+00	2,05E-06	0,00E+00	0,00E+00	0,00E+00	6,11E-05	0,00E+00	2,80E-10	6,73E-09	1,23E-08	5,43E-09	-5,13E-07
AP	mol H ⁺ _{eq.}	1,80E+00	1,93E-02	2,39E-03	0,00E+00	7,00E-03	0,00E+00	0,00E+00	0,00E+00	1,95E+01	0,00E+00	1,65E-04	1,55E-03	1,02E-02	2,29E-03	-2,43E-01
EP-freshwater	kg P _{eq.}	1,54E-01	2,20E-04	1,25E-04	0,00E+00	5,92E-04	0,00E+00	0,00E+00	0,00E+00	3,09E+00	0,00E+00	5,28E-07	3,55E-05	3,64E-04	4,56E-05	-6,87E-02
EP-marine	kg N _{eq.}	5,22E-01	5,73E-03	3,10E-03	0,00E+00	2,88E-03	0,00E+00	0,00E+00	0,00E+00	3,06E+00	0,00E+00	7,66E-05	5,11E-04	3,86E-03	6,60E-03	-4,72E-02
EP-terrestrial	mol N _{eq.}	3,47E+00	6,28E-02	9,11E-03	0,00E+00	1,51E-02	0,00E+00	0,00E+00	0,00E+00	2,74E+01	0,00E+00	8,38E-04	5,56E-03	3,63E-02	9,88E-03	-6,40E-01
POCP	kg NMVOC _{eq.}	1,28E+00	2,33E-02	3,04E-03	0,00E+00	5,96E-03	0,00E+00	0,00E+00	0,00E+00	9,02E+00	0,00E+00	2,50E-04	2,29E-03	9,77E-03	3,02E-03	-1,86E-01
ADP-minerals&metals*	kg Sb _{eq.}	3,16E-02	8,90E-06	1,86E-06	0,00E+00	1,02E-05	0,00E+00	0,00E+00	0,00E+00	4,47E-02	0,00E+00	6,56E-09	1,27E-06	3,15E-05	9,69E-07	-1,33E-03
ADP-fossil*	MJ	4,46E+03	4,90E+01	5,51E+00	0,00E+00	2,33E+01	0,00E+00	0,00E+00	0,00E+00	7,71E+04	0,00E+00	2,39E-01	6,61E+00	1,06E+01	4,30E+00	-5,74E+02
WDP*	m ³	1,07E+02	2,42E-01	1,68E-01	0,00E+00	4,51E-01	0,00E+00	0,00E+00	0,00E+00	2,10E+03	0,00E+00	5,98E-04	3,27E-02	1,21E+00	3,59E-01	-1,15E+01

Acronyms: GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Additional mandatory and voluntary impact category indicators

Results per declared unit																
Indicator	Unit	A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG (1)	Kg CO ₂ eq.	2,80E+02	3,43E+00	5,00E-01	0,00E+00	1,46E+00	0,00E+00	0,00E+00	0,00E+00	3,32E+03	0,00E+00	1,83E-02	4,56E-01	2,59E+01	5,94E+00	-3,91E+01
PM	Disease inc.	1,27E-05	3,19E-07	3,90E-08	0,00E+00	3,20E-07	0,00E+00	0,00E+00	0,00E+00	6,95E-05	0,00E+00	4,69E-09	4,56E-08	1,06E-07	2,89E-08	-2,83E-06
IRP (2)	kBq U-235 _{eq}	2,47E+01	5,61E-02	2,18E-02	0,00E+00	3,09E-01	0,00E+00	0,00E+00	0,00E+00	2,13E+03	0,00E+00	1,06E-04	5,76E-03	3,81E-02	9,20E-03	-3,80E+00
ETP-fw (3)	CTUe	3,86E+03	5,60E+00	7,59E+00	0,00E+00	3,85E+01	0,00E+00	0,00E+00	0,00E+00	1,18E+04	0,00E+00	1,32E-02	9,36E-01	2,77E+01	6,96E+01	-6,03E+02
HTP-c (3)	CTUh	1,50E-07	5,80E-10	2,86E-10	0,00E+00	1,48E-09	0,00E+00	0,00E+00	0,00E+00	1,12E-06	0,00E+00	1,88E-12	7,52E-11	1,91E-09	5,12E-10	-4,38E-09
HTP-nc (3)	CTUh	7,05E-06	3,02E-08	1,55E-08	0,00E+00	1,40E-07	0,00E+00	0,00E+00	0,00E+00	5,81E-05	0,00E+00	2,98E-11	4,28E-09	8,01E-08	2,80E-08	9,40E-07
SQP (3)	Pt	2,90E+03	4,57E+01	5,56E+00	0,00E+00	2,30E+01	0,00E+00	0,00E+00	0,00E+00	1,72E+04	0,00E+00	1,68E-02	6,66E+00	1,45E+01	6,49E+00	-1,93E+02

Acronyms: **GWP-fossil = GWP-GHG:** Global warming potential-Greenhouse gas; **PM**= particulate matter; **IRP** =ionizing radiation, human health; **ETP-fw**=Ecotoxicity tap water-organic; **HTP-c**= human health, carcinogenic effects; **HTP-nc**= human health , non-carcinogenic effects; **SQP** = Land use related impacts/ Soil quality.

- 1)This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.
- 2)This impact category refers to the eventual impacts of low amounts of ionizing radiation on human health from the nuclear fuel cycle. It does not consider the effects due to possible nuclear accidents or occupational exposure due to possible nuclear accidents or occupational exposure due to radon or from some construction materials.
- 3)The results of this environmental impact category must be used wisely, as the uncertainties in the results are elevated and the results are elevated and the experience with this parameter is limited.

Resource use indicators

Results per declared unit																
Indicator	Unit	A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	5,29E+02	7,64E-01	-2,22E+02	0,00E+00	6,35E+00	0,00E+00	0,00E+00	0,00E+00	2,12E+04	0,00E+00	1,51E-03	9,06E-02	1,20E+00	1,49E-01	-9,28E+01
PERM	MJ	2,64E+02	0,00E+00	-2,64E+02	0,00E+00	0,00E+00	0,00E+00									
PERT	MJ	7,93E+02	7,64E-01	-4,86E+02	0,00E+00	6,35E+00	0,00E+00	0,00E+00	0,00E+00	2,12E+04	0,00E+00	1,51E-03	9,06E-02	1,20E+00	1,49E-01	-9,28E+01
PENRE	MJ	3,70E+03	4,90E+01	3,87E+00	0,00E+00	2,34E+01	0,00E+00	0,00E+00	0,00E+00	7,71E+04	0,00E+00	2,39E-01	6,61E+00	-4,83E+02	-3,70E+02	-6,02E+02
PENRM	MJ	2,14E+02	0,00E+00	-1,34E+01	0,00E+00	-1,08E+02	-9,21E+01									
PENRT	MJ	3,91E+03	4,90E+01	-9,57E+00	0,00E+00	2,34E+01	0,00E+00	0,00E+00	0,00E+00	7,71E+04	0,00E+00	2,39E-01	6,61E+00	-5,92E+02	-4,62E+02	-4,82E+02
SM	kg	1,61E+01	2,14E-02	5,53E-03	0,00E+00	4,84E-03	0,00E+00	0,00E+00	0,00E+00	1,28E+01	0,00E+00	9,94E-05	2,82E-03	2,03E-02	1,99E-03	1,44E+01
RSF	MJ	7,00E+00	2,50E-04	4,22E-05	0,00E+00	6,49E-05	0,00E+00	0,00E+00	0,00E+00	1,02E-01	0,00E+00	2,60E-07	3,58E-05	4,48E-04	6,80E-05	-6,09E-03
NRSF	MJ	1,59E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	2,34E+01	6,92E-03	-1,31E-02	0,00E+00	9,73E-03	0,00E+00	0,00E+00	0,00E+00	6,67E+01	0,00E+00	1,58E-05	9,78E-04	1,77E-02	-2,31E-02	-8,70E-01

Acronyms: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water.

Waste indicators

Results per declared unit																
Indicator	Unit	A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	2,49E+01	7,04E-02	5,80E-02	0,00E+00	7,01E-02	0,00E+00	0,00E+00	0,00E+00	1,95E+02	0,00E+00	2,66E-04	1,12E-02	3,71E-01	9,61E-02	-1,18E+01
Non-hazardous waste disposed	kg	9,15E+02	1,38E+00	2,45E+01	0,00E+00	4,38E+00	0,00E+00	0,00E+00	0,00E+00	1,51E+04	0,00E+00	3,63E-03	2,07E-01	1,28E+01	4,27E+01	1,42E+02
Radioactive waste disposed	kg	3,66E+00	1,39E-05	5,49E-06	0,00E+00	7,82E-05	0,00E+00	0,00E+00	0,00E+00	5,47E-01	0,00E+00	2,60E-08	1,41E-06	9,54E-06	2,27E-06	-9,82E-04

Output flow indicators

Results per declared unit																
Indicator	Unit	A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	4,31E-01	0,00E+00													
Material for recycling	kg	2,37E+00	0,00E+00	7,38E+00	0,00E+00	2,08E+01	0,00E+00	0,00E+00								
Materials for energy recovery	kg	2,04E-02	0,00E+00													
Exported energy, electricity	MJ	0,00E+00	0,00E+00	7,30E+00	0,00E+00	5,05E+01	0,00E+00	0,00E+00								
Exported energy, thermal	MJ	0,00E+00	0,00E+00	1,01E+01	0,00E+00	6,96E+01	0,00E+00	0,00E+00								

Additional LCA results

Variability analysis

The table below shows the variation in results between the declared reference product (SABIK 350) and all the other products in the range, including the best-case (SABIK 210) and worst-case configuration (SABIK 600E). Percentage differences are presented for the combined impacts of modules A1–A3 and A–C. Over the full life cycle (A–C), module B6 remains the stage with the highest contribution to total impacts.

Indicator	Unit	Variation (%) of Results per Declared Unit													
		SABIK 210		SABIK 210E		SABIK 350E		SABIK 500		SABIK 500E		SABIK 600		SABIK 600E	
		A1-A3	A-C	A1-A3	A-C	A1-A3	A-C	A1-A3	A-C	A1-A3	A-C	A1-A3	A-C	A1-A3	A-C
GWP-fossil	Kg CO ₂ eq.	-15%	-32%	-9%	-34%	8%	-10%	29%	73%	45%	74%	30%	101%	41%	90%
GWP-biogenic	Kg CO ₂ eq.	-14%	-32%	-8%	-34%	8%	-10%	28%	73%	42%	74%	29%	101%	39%	90%
GWP-luluc	Kg CO ₂ eq.	-4%	-33%	-2%	-36%	2%	-11%	14%	77%	17%	77%	14%	107%	17%	95%
GWP-total	Kg CO ₂ eq.	-7%	-32%	-4%	-35%	4%	-11%	27%	73%	35%	74%	27%	102%	32%	90%
ODP	kg CFC11 _{eq.}	-20%	-30%	-17%	-32%	4%	-8%	12%	60%	20%	62%	12%	83%	18%	75%
AP	mol H ⁺ _{eq.}	-8%	-32%	-6%	-34%	4%	-10%	24%	72%	32%	73%	25%	100%	31%	89%
EP-freshwater	kg P _{eq.}	-5%	-33%	-2%	-35%	4%	-11%	12%	73%	21%	74%	12%	103%	17%	90%
EP-marine	kg N _{eq.}	-6%	-30%	-4%	-32%	3%	-9%	54%	73%	59%	74%	54%	99%	58%	88%
EP-terrestrial	mol N _{eq.}	-11%	-31%	-7%	-33%	4%	-10%	24%	70%	32%	71%	24%	98%	30%	87%
POCP	kg NMVOC _{eq.}	-15%	-31%	-9%	-33%	8%	-9%	19%	69%	32%	71%	19%	96%	30%	86%
ADP-minerals&metals*	kg Sb _{eq.}	-3%	-21%	-3%	-23%	1%	-7%	9%	49%	10%	49%	9%	67%	10%	59%
ADP-fossil*	MJ	-18%	-33%	-8%	-35%	13%	-10%	24%	74%	47%	75%	25%	103%	42%	91%
WDP*	m ³	-14%	-33%	-9%	-35%	6%	-11%	39%	75%	54%	76%	41%	104%	49%	92%

Acronyms: GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

End of Life scenarios

Below, as indicated by the PCR, are the impacts associated with different waste management scenarios: 100% landfilling, 100% recycling, and 100% incineration. None of these scenarios is realistic, as the waste management of EEE equipment is typically carried out through a combination of methods, and some components cannot be feasibly recycled.

Indicator	Unit	End of Life scenarios (Module C) results					
		100% Landfilled		100% Recycled		100% Incinerated	
		C3	C4	C3	C4	C3	C4
GWP-fossil	Kg CO ₂ eq.	0,00E+00	2,41E+00	4,33E+00	0,00E+00	5,66E+01	0,00E+00
GWP-biogenic	Kg CO ₂ eq.	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP-luluc	Kg CO ₂ eq.	0,00E+00	2,57E-04	2,77E-03	0,00E+00	6,30E-04	0,00E+00
GWP-total	Kg CO ₂ eq.	0,00E+00	2,41E+00	4,33E+00	0,00E+00	5,66E+01	0,00E+00
ODP	kg CFC11 _{eq.}	0,00E+00	1,12E-08	1,72E-08	0,00E+00	2,93E-08	0,00E+00
AP	mol H ⁺ _{eq.}	0,00E+00	3,06E-03	1,22E-02	0,00E+00	1,53E-02	0,00E+00
EP-freshwater	kg P _{eq.}	0,00E+00	7,05E-05	7,31E-04	0,00E+00	4,59E-04	0,00E+00
EP-marine	kg N _{eq.}	0,00E+00	5,12E-02	5,16E-03	0,00E+00	8,30E-03	0,00E+00
EP-terrestrial	mol N _{eq.}	0,00E+00	1,25E-02	3,43E-02	0,00E+00	7,27E-02	0,00E+00
POCP	kg NMVOC _{eq.}	0,00E+00	4,82E-03	1,03E-02	0,00E+00	1,92E-02	0,00E+00
ADP-minerals&metals*	kg Sb _{eq.}	0,00E+00	8,52E-07	5,03E-05	0,00E+00	5,20E-06	0,00E+00
ADP-fossil*	MJ	0,00E+00	9,50E+00	1,88E+01	0,00E+00	1,78E+01	0,00E+00
WDP*	m ³	0,00E+00	4,91E-02	6,71E-01	0,00E+00	3,68E+00	0,00E+00

Acronyms: GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Geographical variability analysis

Below are the impacts of the SABIK 350 module B6 when the product operates under the defined scenario across various countries and geographies. The dataset used corresponds to low-voltage electricity (market activity).

Results per declared unit - B6								
Indicator	Unit	SPAIN	FRANCE	GERMANY	BELGIUM	NORWAY	ITALY	GREAT BRITAIN
GWP-fossil	Kg CO ₂ eq.	2,07E+03	8,83E+02	3,94E+03	2,07E+03	2,42E+02	3,57E+03	2,63E+03
GWP-biogenic	Kg CO ₂ eq.	5,14E+00	1,58E+00	1,98E+01	3,04E+00	4,20E+00	1,47E+01	1,54E+00
GWP-luluc	Kg CO ₂ eq.	2,73E+01	8,85E-01	8,13E+00	5,57E+00	1,13E+00	7,75E-01	3,28E+00
GWP-total	Kg CO ₂ eq.	2,10E+03	8,87E+02	3,97E+03	2,08E+03	2,48E+02	3,59E+03	2,63E+03
ODP	kg CFC11 _{eq.}	4,23E-05	3,13E-05	5,07E-05	8,86E-05	6,54E-06	8,25E-05	1,34E-04
AP	mol H ⁺ _{eq.}	1,14E+01	6,18E+00	1,14E+01	6,61E+00	3,36E+00	1,51E+01	9,78E+00
EP-freshwater	kg P _{eq.}	4,93E-01	3,70E-01	5,41E+00	4,59E-01	2,56E-01	8,01E-01	4,74E-01
EP-marine	kg N _{eq.}	2,04E+00	1,17E+00	2,93E+00	1,37E+00	2,92E-01	2,25E+00	2,12E+00
EP-terrestrial	mol N _{eq.}	2,14E+01	9,74E+00	2,16E+01	1,40E+01	3,55E+00	2,45E+01	2,45E+01
POCP	kg NMVOC _{eq.}	7,66E+00	3,34E+00	6,98E+00	4,45E+00	1,08E+00	1,05E+01	6,85E+00
ADP-minerals&metals*	kg Sb _{eq.}	4,51E-02	4,24E-02	5,01E-02	4,75E-02	3,84E-02	4,50E-02	4,44E-02
ADP-fossil*	MJ	6,83E+04	1,15E+05	6,17E+04	8,20E+04	2,93E+03	5,74E+04	7,15E+04
WDP*	m ³	1,35E+03	1,45E+03	1,02E+03	9,65E+02	1,27E+04	2,20E+03	7,05E+02

Acronyms: GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption.

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Abbreviations

All abbreviations used in the EPD are described below:

Abbreviation	Definition
CEN	European Committee for Standardization
CLC	Co-location Centre
CNMC	Comisión Nacional de los Mercados y la Competencia
CPC	Central Product Classification
EEE	Electrical and Electronic Equipment
EF	Environmental Footprint
EN	European Norm (Standard)
EPD	Environmental Product Declaration
GPI	General Programme Instructions
ISO	International Organization for Standardization
LCA	Life-Cycle Assessment
NPCR	National Product Category Rules
PCR	Product Category Rules
PEP	Product Environmental Profile
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals



References

1. PCR 2019:14. Construction products. Version 2.0.1. Valid until 07/04/2030.
2. c-PCR-018 Ventilation components (Adopted from NPCR 030:2021).
3. ISO 14025:2010: Environmental labels and declarations-Type III Environmental Declarations-Principles and procedures.
4. ISO 14040: Environmental management-Life Cycle Assessment-Principles and framework (2006).
5. ISO 14044: Environmental management-Life Cycle Assessment-Requirements and guidelines (2006).
6. EN 15804:2012+A2:2019/AC:2021: Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.
7. General Programme Instructions for international EPD System version 5.0.0 (2024-06-19).
8. LCA Report Memoria DOMESTIC HEAT RECOVERY VENTILATION SYSTEMS: SABIK.
9. Product Environmental Footprint report. Representative product study for: Unidirectional Residential Ventilation Units (URVU), Bidirectional Residential Ventilation Units (BRVU), Non-residential Ventilation Units (NRVU), Fans (>125W); EVIA.
10. Packaging waste by waste management operations; EUROSTAT; 2025*.
11. EN 50693:2020 - Product category rules for life cycle assessments of electronic and electrical products and systems

*Although the latest update of the dataset is 2025, the statistics appear to cover only up to 2023.

Version History

1. Original Version of the EPD, 2025-11-27



solerpalau.com