


Protective grids


DEF-D-TGT/THGT – protective grid

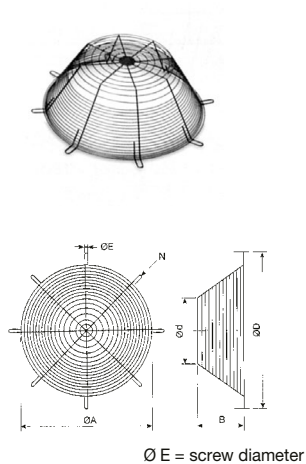

- on the motor side for axial fans
- electroplated
- stable design suitable for TGT, THGT

Type	Ø A	B	Ø d	Ø D	Ø E	N	weight [kg]
400	380	170	365	465	12	4	2.2
450	430	235	335	515	12	4	2.7
500	480	235	400	560	12	6	3.5
560	540	295	430	620	12	6	4.2
630	610	295	382	690	12	6	3.4
710	690	295	420	770	12	8	4.4
800	780	295	460	860	12	8	5.2
900	880	335	540	970	12	8	6.4
1000	980	335	620	1,070	12	8	8.1
1120	1,100	445	630	1,190	15	10	15.0
1250	1,230	465	800	1,320	12	10	13.5
1400	1,380	530	791	1,470	15	12	15.0
1600	1,580	530	995	1,680	20	12	15.0


DEF-AN – protective grid

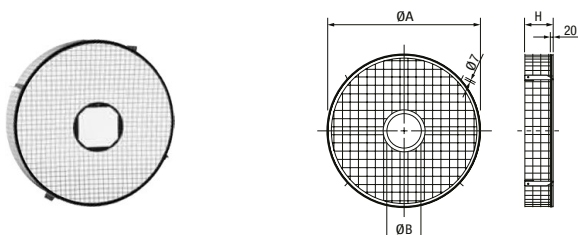

- suction grid for axial fans
- grid opening dimensions 25 × 25 mm

Type	Ø A	H	Ø B
DEF-800 AN	926	178	208
DEF-900/901 AN	1,026	228	308/215
DEF-1000 AN	1,154	163	208

DEF-D – protective grid

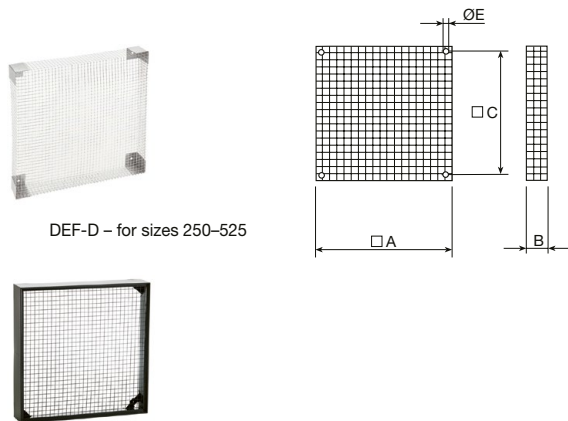

DEF-D – for sizes 250–525



DEF-D – for sizes 630–1000

- on the discharge side for wall-mounted axial fans
- electroplated
- mesh spacing of the protective net
 - type 250–525 – 10.6 × 10.6 mm
 - type 630–1000 – 25 × 25 mm

Type	Ø A	B	Ø C	Ø E
DEF-250 D	380	170	365	10
DEF-325 D	430	190	335	10
DEF-375 D	480	190	400	12
DEF-450 D	540	230	430	12
DEF-525 D	610	270	382	12
DEF-630 D	690	255	420	12
DEF-800 D	780	295	460	12
DEF-1000 D	880	315	540	12